

OneLoad Integration with Candela RMS


Prepared By: *HM. Nadim*

Here comes a new feature in Candela RMS. Now you can sell Mobile Vouchers at your shop. You can have all available vouchers of all mobile companies in Candela RMS and you can sell any of these vouchers, if you have an internet connection available at shop. All you need is to get integrated and configured OneLoad with your running Candela RMS.

Let's see how we can configure and make Candela RMS ready for the Mobile Voucher sales.

1. User Name & Password at System Configuration.

You will be provided with two types of user name & password. One is for the system configuration level and second is for the shop configuration level. Let's look for the user name & password at system configuration. This is required to fetch a voucher from OneLoad service over the internet. We will save a user name & password at ***“Configuration > system configuration screen > General Tab”***

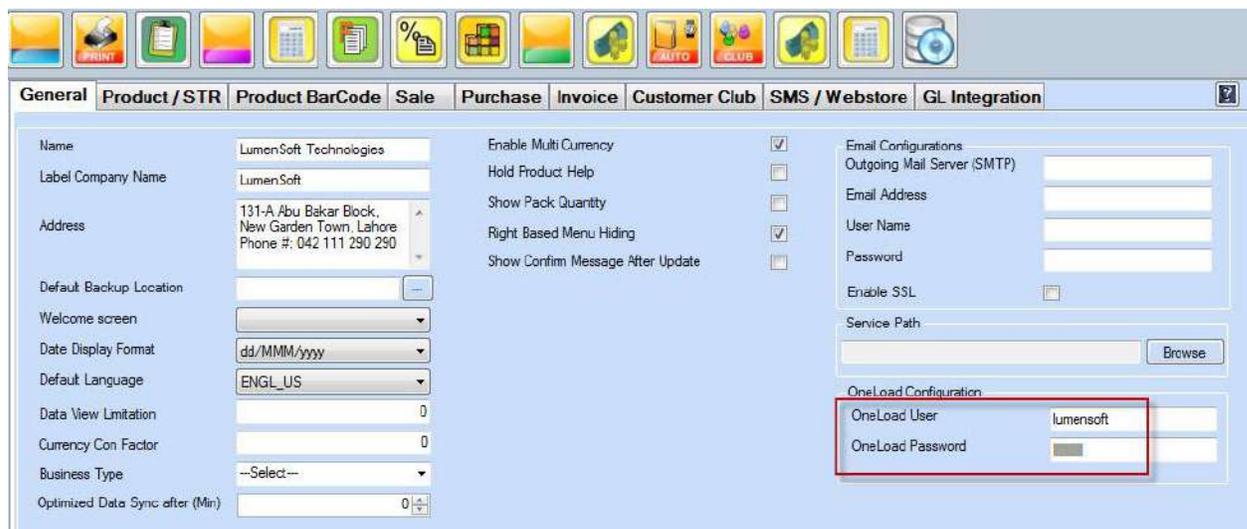

The screenshot displays the 'General' tab of the system configuration interface. The 'OneLoad Configuration' section is highlighted with a red box, showing the following fields:

Field	Value
OneLoad User	lumensoft
OneLoad Password	[Masked]

2. User Name & Password at Shop Definition.

This User name & password is required by the system to check that the selected shop user can have access to the OneLoad products or not. If there is no user name or password saved at product definition, this means that shop is not configured to sell Mobile Vouchers. If a user name and password exists for the selected shop then that shop user can sell Mobile Vouchers and this user name and password will be used for the authentication/login purpose with OneLoad service. We will save a user name & password at ***“Configuration > Shop Definition screen > Misc Tab”***

Bin Majeed (MAJEED) (Company Owned)

Misc

Shop IP Address:

Shop Windows User Name:

Shop Windows Password:

Shop SQL Instance:

Shop Candela Path:

Email Server

Outgoing Mail Server (SMTP):

Email Address:

User Name:

Password:

Enable SSL:

OneLoad Configuration

User Name:

Password:

Negative Inventory: [Customize line items](#)

Use system configuration:

This button is used to validate whether the mentioned user name and password are authenticated

3. Line Item Definition.

We need to configure a separate OneLoad line item, in which each Mobile Voucher will be defined as item. There is OneLoad line item check at "**Configuration > Misc > Line Item Based Attributes > Line Item Definition screen**". While defining OneLoad line item, this will be checked and make the products of this line item distinct for OneLoad at sales and return screen.

Line Item

Name: With Size and Color:

Code: OneLoad Line Item:

Sort Order:

Comments:

Line Item Name	Line Item Code	Sort Order	Comments	With Size and c...	OneLoad Line t...
General	01	0		<input type="checkbox"/>	<input type="checkbox"/>
Mobile Cards	MC	0		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
WOSize	WO	0		<input type="checkbox"/>	<input type="checkbox"/>

4. Product Definition.

While defining some OneLoad Products, we have some convention to follow. The product name will have the following parts.


1. Mobile Company Short Name

2. Card Amount

Both will be separated with hyphen (-) sign. Here is an example;

warid-250

Anything else in product definition will be at user's ease.

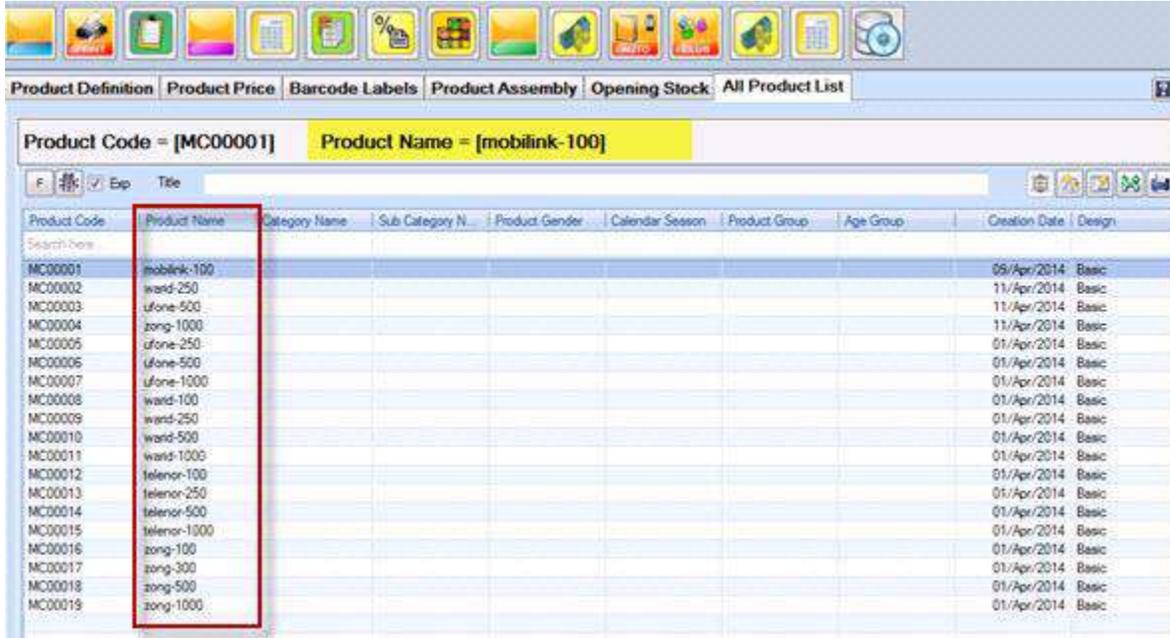

Product Code	Product Name	Category Name	Sub Category Name	Product Gender	Calendar Season	Product Group	Age Group	Creation Date	Design
MC00001	mobilink-100							09/Apr/2014	Basic
MC00002	warid-250							11/Apr/2014	Basic
MC00003	ufone-500							11/Apr/2014	Basic
MC00004	zong-1000							11/Apr/2014	Basic
MC00005	ufone-250							01/Apr/2014	Basic
MC00006	ufone-500							01/Apr/2014	Basic
MC00007	ufone-1000							01/Apr/2014	Basic
MC00008	warid-100							01/Apr/2014	Basic
MC00009	warid-250							01/Apr/2014	Basic
MC00010	warid-500							01/Apr/2014	Basic
MC00011	warid-1000							01/Apr/2014	Basic
MC00012	telcelor-100							01/Apr/2014	Basic
MC00013	telcelor-250							01/Apr/2014	Basic
MC00014	telcelor-500							01/Apr/2014	Basic
MC00015	telcelor-1000							01/Apr/2014	Basic
MC00016	zong-100							01/Apr/2014	Basic
MC00017	zong-300							01/Apr/2014	Basic
MC00018	zong-500							01/Apr/2014	Basic
MC00019	zong-1000							01/Apr/2014	Basic

Selling Mobile Vouchers.

We are done with the configuring Candela RMS for OneLoad. Now Candela RMS is ready for Mobile Voucher sales. Next part is how we can sell a mobile voucher? The answer is as simple as we save an invoice at sale and return screen. You have to load items as you do in routine and save that invoice. There is an addition of internet connection availability validation at save time. If the internet is connected and OneLoad service is up then you will get a print of voucher at your configured printer. That print will be having the card voucher number (which we usually scratch when buy a mobile company's own voucher) and a card serial number.

And obviously the default invoice of print will be as usual as you have it.

But if the internet is not connected then you will be not allowed to save an invoice having OneLoad items in it. Either you have to remove those items from the invoice or you have to try again for the internet connection.

Here is how the print will look like:



LumenSoft Technologies

Date: 11/25/2014 5:18:15 PM

Shop: Bin Majeed

Voucher: ufone-250

Amount: 250.00

Card #: 68606900707510

Serial #: 0004000233000563

Log Report for the mobile vouchers.

There is also a report designed in Candela RMS to check and trace the log of mobile vouchers sales. You can re-print the vouchers if there was an error while printing at sales and return screen. Moreover, you can check what kind of error was occurred in the printing of card voucher. You can generate the report from **"Menu: Reports > Sales Reports > C-18 Report"**

Invoice No	Sale Date	Card Code	Item Name	Amount	Status	Card Number	Print
40	22/May/2014	wand	wand-100	100.00	Successful	316060062889912	Print
41	22/May/2014	ufone	ufone-250	250.00	Successful	89343674815646	Print
42	23/May/2014	ufone	ufone-100	100.00	Successful	69565289721127	Print
43	23/May/2014	ufone	ufone-100	100.00	Successful	89818790649775	Print
44	27/May/2014	ufone	ufone-100	100.00	Successful	69151186872952	Print
44	27/May/2014	ufone	ufone-100	100.00	Successful	69665252302134	Print
44	27/May/2014	ufone	ufone-500	500.00	Successful	89404947454823	Print
45	26/May/2014	ufone	ufone-100	100.00	Successful	69242036441508	Print
45	28/May/2014	mobilink	mobilink-100	100.00	Successful	04702619407294	Print
46	28/May/2014	ufone	ufone-100	100.00	Successful	69656110342861	Print
47	25/May/2014	wand	wand-100	100.00	Successful	3766864290790631	Print
48	28/May/2014	wand	wand-100	100.00	Successful	0331860571966830	Print
49	25/May/2014	wand	wand-100	100.00	Successful	3577405563658634	Print
50	25/May/2014	telenor	telenor-100	100.00	Successful	16839774823980	Print
51	30/May/2014	wand	wand-250	250.00	Successful	4574200675469360	Print
52	03/Jun/2014	wand	wand-100	100.00	Successful	1832533148118661	Print
53	03/Jun/2014	wand	wand-500	500.00	Successful	2190077950085850	Print
53	03/Jun/2014	wand	wand-500	500.00	Successful	0719460265354365	Print
54	04/Jun/2014	telenor	telenor-500	500.00	Successful	83420278887743	Print
55	04/Jun/2014	wand	wand-100	100.00	Successful	2375851433785160	Print
56	06/Jun/2014	mobilink	mobilink-100	100.00	Successful	45788540839479	Print

You can also check your current balance through this report. Open this report and click on the button "OneLoad balance"

The image shows two side-by-side screenshots of a software interface for generating a report. The left screenshot shows the report configuration screen, and the right screenshot shows the report results.

Left Screenshot: Report Configuration

- Buttons: PRINT, [Clipboard], [Folder], [Calculator]
- Title: C-18 OneLoad Sales Report
- Tab: OneLoad Sales Report
- Date Range: 25/Nov/20 - 25/Dec/20
- Buttons at bottom: OneLoad Balance >>>>>, Generate Report >>>>>

Right Screenshot: Report Results

- Buttons: F, [Filter], [Exp], Title
- Instruction: Drag a column header here to group by that column.
- Table:

Shop Name	Remarks	Balance
Search here...		
▶ Garden Town	Success	10,652.00
Σ		10,652.00

Record: 1 Of 1

A red arrow points from the "OneLoad Balance >>>>>" button in the left screenshot to the "Balance" column header in the right screenshot.